

SPECIFICATIONS

- Structures:* RCC Framed Structure. Brick Panel Wall Plastered smooth with Cement mortar.
- Flooring:* Hall, Kitchen and Bedrooms will be laid with 2'x 2' Vitrified Tiles, skirting will be of same tiles up to 4 inches height.
- Doors & Windows:* Teak Wood Frame with Teak Panel Door for Main entrance. Teak wood frame with flush doors for Bed Rooms. Teak Wood Windows with glazed shutters and steel grills will be provided .
- Electrical:* Electrical wiring will be concealed suitable for 3-phase supply. Each flat will be provided with power points for refrigerator, Water heater, air conditioner etc. Bedrooms will have two light points and one fan point. Switch Board will have one 5Amps plug socket. Kitchen will have two 5 Amps and one 15 Amps power points. Anchor Roma Modular Switches will be Provided.
- Painting:* All interior walls will be painted with good quality Emulsion paint with Putty Finish. Doors and windows shall be painted with one coat of primer and two coats of enamel paint of good quality. Main door shall be varnished on both sides.
- Kitchen:* Black Granite slab for Kitchen platform with Stainless steel sink. Glazed tiles upto 2 feet height above the kitchen platform.
- Toilets:* Anti skid flooring tiles and matching coloured ceramic tiles upto 7 feet height for the walls.
Parryware European Water closet & Parryware C.P.Fittings will be provided.
PVC pipes for external piping and CPVC pipes for concealed piping shall be used for all water lines.

YBM CONSTRUCTION

#64, 4th Layout, Teachers Colony
Kolathur, Chennai - 99.


Mob: 9080445500 / 9840408191 / 9962610661

Email:- ybm_construction@yahoo.com

Web Site: www.ybmconstruction.in

YBM's Lake View

No. 33 & 35, Kandigai Street, TVS Nagar West, Korattur, Chennai - 600 076




A - Block

B - Block



80'-0"

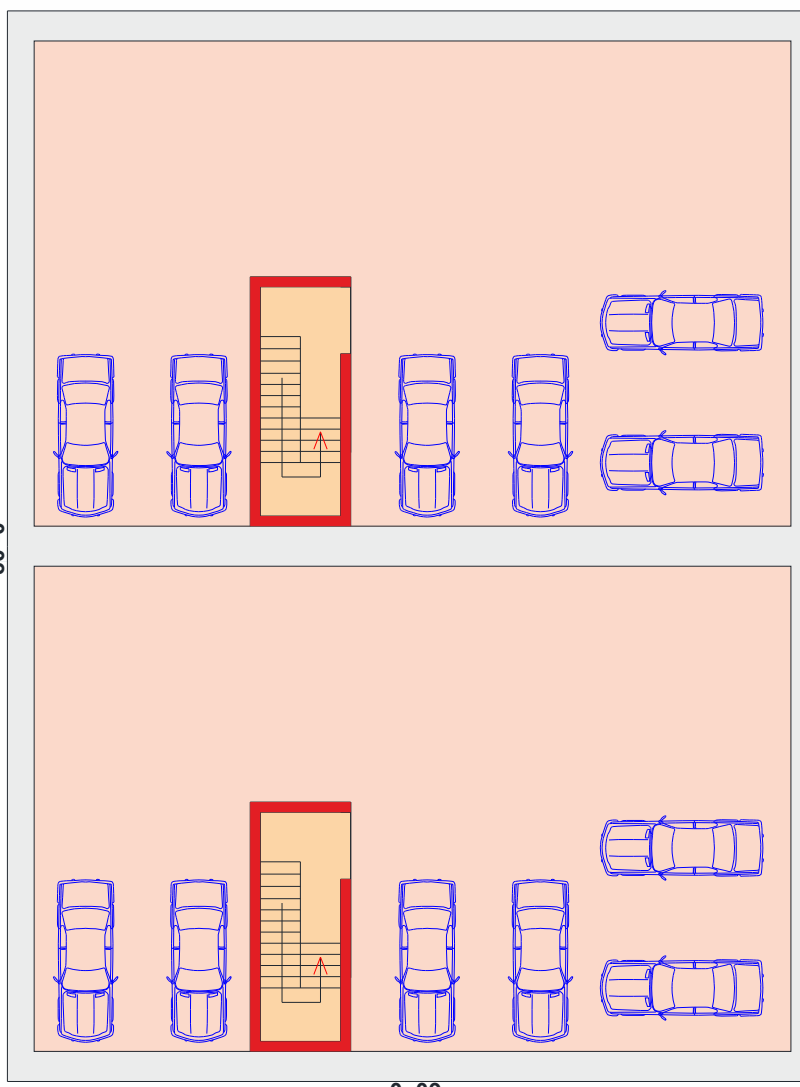


09

Stilt Floor

A - Block

B - Block

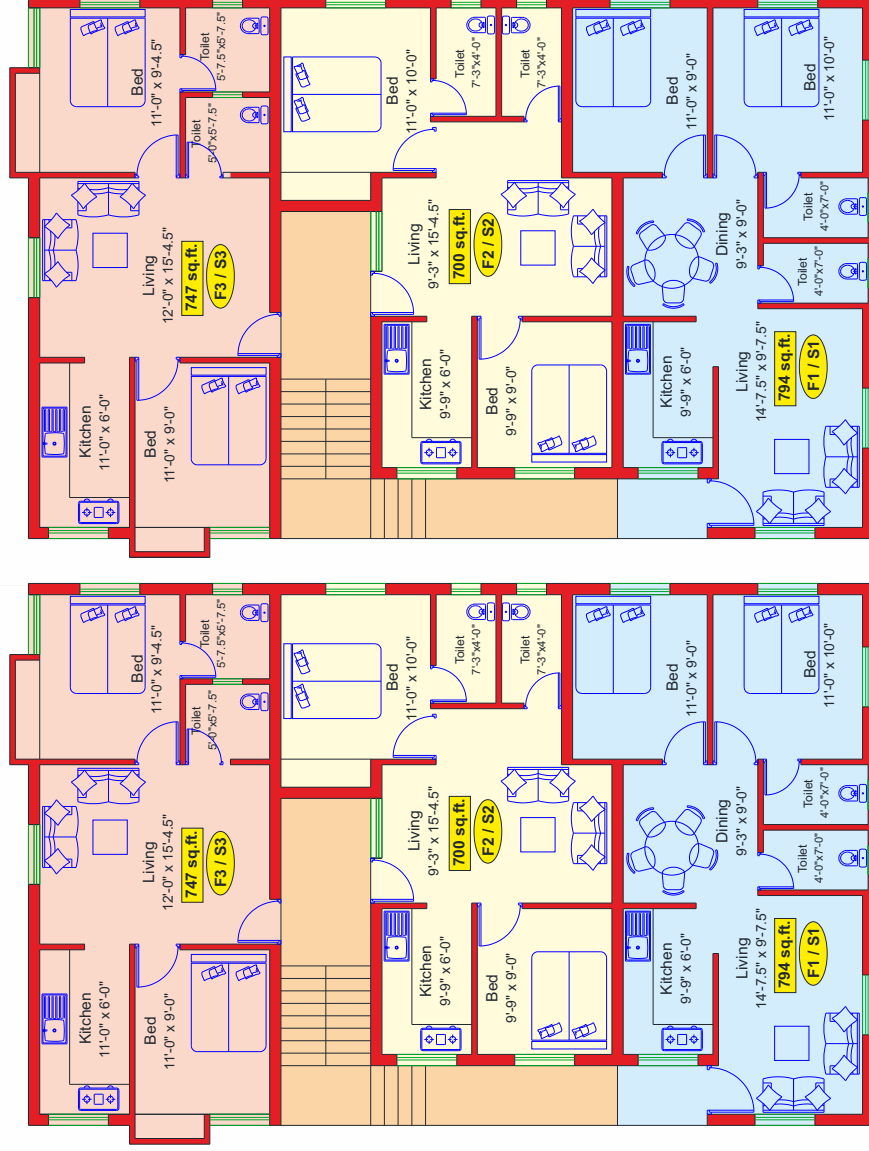

First / Second Floor